


Easy-Rooter™

A heavy-duty machine for 3" thru 10" lines.

The Easy Rooter is a tough, easy-to-use machine. It has a rugged powder coated steel frame with special "roll bars" to protect the motor, and heavy-duty roller bearings in the cage for longer life and greater motor efficiency on long runs. The cage holds 100 feet of 3/4" or 5/8" Flexicore® cable to clear tree roots and other difficult obstructions in 3" to 10" drain lines.

The Easy Rooter rolls smoothly on big 10" ball bearing wheels mounted on a half inch reinforced axle. A built-in brake holds the machine securely on the job or in a customer's car during transport. An extra-long folding handle quickly locks in place, making it much easier to wheel the Easy Rooter to the job, without sacrificing the compact size needed for easy loading in a car trunk. Power is supplied by a 1/3 hp capacitor motor with thermal overload protection. A momentary contact reverse switch protects the cable by preventing the operator from running the machine in reverse for more than a few seconds at a time. Standard safety features include an air actuated foot pedal, ground fault circuit interrupter, safety slip clutch, and instructional video.

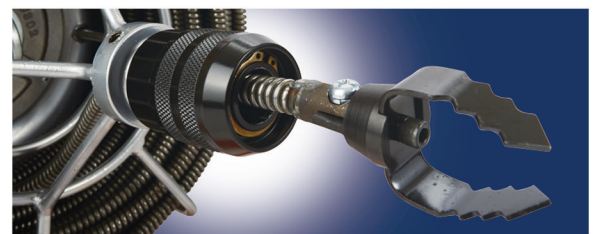

Reverse Switch

A momentary contact reverse switch protects the cable by preventing the operator from running the machine in reverse for more than a few seconds at a time.



Patented Chuck

A chuck secures the cable during operation. With a just a quarter turn, the chuck tightens firmly on the cable. It's faster and easier to use than a thumb screw.

Folding Handle

Handle folds to take less space in car trunk.

Power Cord: 20 ft. 3-wire vinyl covered with molded plug. Equipped with ground fault circuit interrupter.

Wheels: 10" semi-pneumatic with roller bearings.

Cables: 3/4" for 4"-10" lines and 5/8" for 3"-6" lines.

Leather Gloves: With double-reinforced palm, for hand protection when guiding cable.

Cutter Set: Spear Head, 2" U-Cutter, 3" Heavy-Duty Side Cutter, 3" Heavy-Duty Saw Blade and Large Retriever. Others available. See Cutters & Cables.

Instructional Video Included.



Specifications:

Weight: 80 lbs. without cable. (36 kg).

Cage: 100 ft. of 3/4" or 5/8" capacity with heavy duty roller bearings.

Motor: 1/3 hp heavy duty, capacitor start, thermal overload protection, Forward/Off/Reverse Switch.

Safety Slip Clutch: Protects cable and operator.

Foot Pedal: Leaves operator's hands free to control cable. Uses air pressure, so there's no electrical contact between pedal and motor.

Flexicore Cable: Heavy gauge wire coiled tightly around 49-strand aircraft-type wire rope and heat treated.

General General Wire Spring Co.
PIPE CLEANERS
www.drainbrain.com

McKees Rocks, PA 15136 USA
800-245-6200 or 412-771-6300

The toughest tools down the line.™



MADE IN USA

C-ER-0816