


# Easy-Rooter™

**A heavy-duty machine for 3" thru 10" lines.**

The Easy Rooter is a tough, easy-to-use machine. It has a rugged powder coated steel frame with special "roll bars" to protect the motor, and heavy-duty roller bearings in the cage for longer life and greater motor efficiency on long runs. The cage holds 100 feet of 3/4" or 5/8" Flexicore® cable to clear tree roots and other difficult obstructions in 3" to 10" drain lines.

The Easy Rooter rolls smoothly on big 10" ball bearing wheels mounted on a half inch reinforced axle. A built-in brake holds the machine securely on the job or in a customer's car during transport. An extra-long folding handle quickly locks in place, making it much easier to wheel the Easy Rooter to the job, without sacrificing the compact size needed for easy loading in a car trunk. Power is supplied by a 1/3 hp capacitor motor with thermal overload protection. A momentary contact reverse switch protects the cable by preventing the operator from running the machine in reverse for more than a few seconds at a time. Standard safety features include an air actuated foot pedal, ground fault circuit interrupter, safety slip clutch, and instructional video.

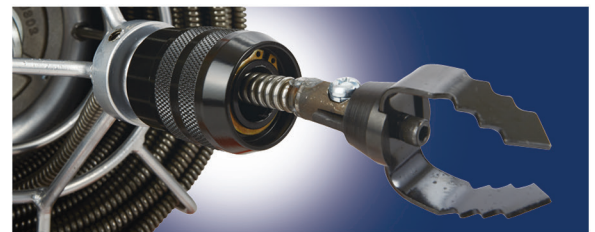

#### Reverse Switch

A momentary contact reverse switch protects the cable by preventing the operator from running the machine in reverse for more than a few seconds at a time.



#### Patented Chuck

A chuck secures the cable during operation. With a just a quarter turn, the chuck tightens firmly on the cable. It's faster and easier to use than a thumb screw.

#### Folding Handle

Handle folds to take less space in car trunk.

**Power Cord:** 20 ft. 3-wire vinyl covered with molded plug. Equipped with ground fault circuit interrupter.

**Wheels:** 10" semi-pneumatic with roller bearings.

**Cables:** 3/4" for 4"-10" lines and 5/8" for 3"-6" lines.

**Leather Gloves:** With double-reinforced palm, for hand protection when guiding cable.

**Cutter Set:** Spear Head, 2" U-Cutter, 3" Heavy-Duty Side Cutter, 3" Heavy-Duty Saw Blade and Large Retriever. Others available. See Cutters & Cables.

**Instructional Video Included.**



#### Specifications:

**Weight:** 80 lbs. without cable. (36 kg).

**Cage:** 100 ft. of 3/4" or 5/8" capacity with heavy duty roller bearings.

**Motor:** 1/3 hp heavy duty, capacitor start, thermal overload protection, Forward/Off/Reverse Switch.

**Safety Slip Clutch:** Protects cable and operator.

**Foot Pedal:** Leaves operator's hands free to control cable. Uses air pressure, so there's no electrical contact between pedal and motor.

**Flexicore Cable:** Heavy gauge wire coiled tightly around 49-strand aircraft-type wire rope and heat treated.

**General** General Wire Spring Co.  
**PIPE CLEANERS**  
www.drainbrain.com

McKees Rocks, PA 15136 USA  
800-245-6200 or 412-771-6300

**The toughest tools down the line.™**



MADE IN USA

C-ER-0816